

For sealed heating (acc. to EN12828) and cooling installations.

When the temperature in the installation rises, the system water will expand. The 'expansion water' is stored temporarily in the expansion vessel to keep the pressure in the installation at the correct level. Each vessel is factory tested.

Privalumai

- The thread of the system connection is uncoated, ensuring problem free connection.
- The fixed bag-type diaphragm prevents the water to come in contact with the bare steel of the vessel.
- Nitrogen gas filling for longer maintenance of pre-pressure.


Techninės specifikacijos

- Maximum working pressure: 6.0 bar.
- Red (RAL 3002) epoxy powder coating (also available in white (RAL9010)).
- Vessels in accordance with EN13831.
- Suitable for systems with a maximum system temperature of 120 °C.
- Min. / max. temperature diaphragm: -10 / 70 °C.
- Diaphragm: EPDM.
- All welded construction.
- Zinc plated flange.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- In accordance with Pressure Equipment Directive 2014/68/EU.
- Baseflex 35 - 80: Standard equipped with legs.



Aprašymas	Baseflex exp. vessel 18/1.5 [6bar]	
Gaminio kodas	25302	
EAN	08712874253025	
Modelis	<u>Baseflex 8 - 80</u>	
Talpa [l]	18	
Pradinis slėgis (bar)	1,5	
Max. working pressure [bar]	6	
Matmenys	A [mm]	290
	B [mm]	375
	Ø C [mm]	-
	D [mm]	-
Sist. jungtis (E)	G $\frac{3}{4}$ " M	
Svoris [kg]	3,4	



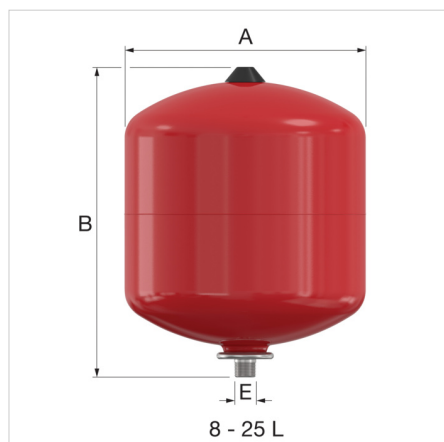

Klasifikavimas Bendrieji duomenys

Etim grupė	Pressure increase/decrease
Etim klasė	Membraninis slėgio išsiplėtimo indas
Produkto pavadinimas	Baseflex exp. ves. 18L/1.5 [6bar]
Prekinis ženklas	Flamco
Produkto tipas	18L/1.5 [6bar]
Artikelnummer	25302

Klasifikavimo požymiai

Tinka centriniam šildymui	Ja
Ribinis slėgis	6 Bar
Tinka šaldymui	Ja
Suitable for tap water	Nee
Geriamam vandeniui	Nee
Apimtis	18 Litre
Priešslėgis	1.5 Bar
On base, vertical	Nee
On base, horizontal	Nee
Maks.darbinis slėgis	3 Bar
Su fiksuota sienos atrama	Nee
Pozicija, vertikalus	Ja
Maksimali terpės temperatūra (testinė)	70 Degrees celsius
Pozicija, horizontalus	Nee
Su kojomis	Nee
Su keičiama membrana	Nee
Nominalus vidinis skersmuo, plėtimosi jungtis	¾" (20)
Išorinis vamzdžio skersmuo, plėtimosi jungtis	26.5 Millimetre
Jungtis	Išorinis sriegis lygiagretus, dujoms (BSPP)
With vessel manifold	Nee
Spalva	Raudona
With drain	Nee
Skersmuo	290 Millimetre
Aukštis	375 Millimetre
Su manometru	Nee
With safety valve	Nee
Max. glycol mixture	50 Percentage

Raskite daugiau informacijos internete:

[Installation and operating instruction](#)

[Declaration of conformity PED 2014/68/EU](#)

[PED Module D](#)

[PED Module D1](#)

[EU Declaration of Conformity Module A](#)

[Baseflex DWG](#)

[Baseflex STEP](#)

[Baseflex RFA](#)

[Produktų apžvalga PDF](#)