

Flamco XStream dirt separators ensure lower energy consumption, less wear and tear, fewer breakdowns, a longer lifespan and thus a higher efficiency of heating and cooling installations.

**Less wear, less maintenance.**

The Flamco XStream Clean ensures optimal separation of dirt and magnetite. The result: less heat losses, less wear, less maintenance and a heating system that lasts longer.

### Advantages

- With an unique ECO/ MAX mode.  
In the ECO mode a part of the system water (partial flow) is led through the Flamco XStream.  
In the MAX mode all the system water is led through the Flamco XStream.
- Up to 15% less energy consumption of the heating system.\*
- Up to 6% more efficiency of the heating system.\*
- The unit is 360 degree rotatable for ease of installation.
- No account needs to be taken of the flow direction of the installation. This prevents installation errors.
- Thanks to the powerful internal magnet, the Flamco XStream Clean and the Vent-Clean have a great attraction to magnetite.
- Insulation is an integral part of the design of the Flamco XStream. This reduces heat losses to a minimum.
- The intergrated service indicator indicates when the system was last flushed/vented in the MAX mode.

\* Calculated according to the Hysopt method in a system with a gas boiler and manually operated radiator valves.

### Technical Specifications

- Materials: brass and high-quality plastic.
- Minimum/Maximum operating temperature: -10 °C / 120 °C.
- Minimum/Maximum system pressure: 0,2 / 10 bar.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- Suitable for addition of ethanol-based anti-freeze up to 30%.
- Minimum/Maximum flow velocity: 0.2 / 3 m/s.
- Medium pH: 5 / 10.
- Material: EPP insulation.  $\lambda$  : 0.036 W/m.
- Average thickness insulation: 20 mm.




Description	XStream Clean 1" F	
Order Code	11032	
GTIN	08712874110328	
Model	<u>Flamco XStream Clean</u>	
Connection	[DN]	25
	(A)	G 1" F
$K_v^*$ [m <sup>3</sup> /h] (ECO)	26.7	
$K_v^*$ [m <sup>3</sup> /h] (MAX)	7.8	
Weight [kg]	1.8	

\*  $K_v = Q / \sqrt{\Delta P}$  Q: Flow [m<sup>3</sup>/h]  $\Delta P$ : Pressure loss over the product (1 bar)

Flow factor  $K_v$ : Rate of flow [m<sup>3</sup>/h] which results in a 1 bar pressure drop across the product. This is different then the maximum allowed flow rate of the

product.

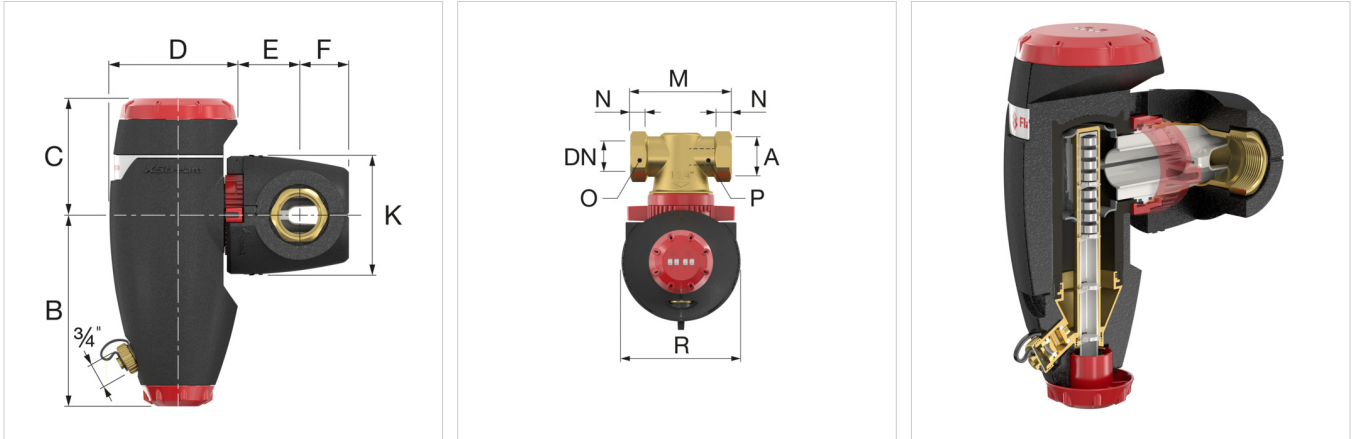

### Flamco XStream Clean - Dimensions

Type	Dimensions										
	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	K [mm]	M [mm]	N [mm]	O [mm]	P [mm]	R [mm]
XStream Clean 22	149	98	106	44	41	102	119	24	32	24	114
XStream Clean 3/4 F	149	98	106	44	41	102	100	14	32	-	114
XStream Clean 1 M	149	98	106	44	41	102	100	13	-	27	114
XStream Clean 1 F	181	110	121	53	45	114	110	16	41	-	130
XStream Clean 1 1/4 M	181	110	121	53	45	114	110	14	-	34	130
XStream Clean 1 1/4 F	181	110	125	57	48	114	110	18	50	-	130
XStream Clean 1 1/2 F	208	124	139	62	51	132	129	18	55	-	145
XStream Clean 2 F	208	124	139	65	58	132	140	23	70	-	145





**Classification General Data**

<b>Etim Group</b>	Filters/separators
<b>Etim Class</b>	Air-/dirt separator
<b>Product Name</b>	XStream Clean dirt separator with full and partial flow function and i
<b>Brand</b>	FLAMCO
<b>Product Type</b>	XStream (= < 2")
<b>Order Code</b>	11032
<b>GTIN</b>	08712874110328

**Attributes**

<b>Material</b>	Plastic
<b>Separator type</b>	Dirt
<b>Model</b>	Horizontal/vertical
<b>Material of connection</b>	Brass
<b>Material quality connection</b>	Other
<b>Housing material</b>	Brass
<b>Housing material quality</b>	Other
<b>Variable flow direction</b>	Yes
<b>Suitable for heating</b>	Yes
<b>Suitable for cooling</b>	Yes
<b>Suitable for solar</b>	No
<b>Nominal diameter</b>	1 inch (25)
<b>Outer pipe diameter</b>	33.7 Millimetre
<b>Connection</b>	Internal thread cylindrical BSPP-G (ISO 228-1)
<b>Construction length</b>	110 Millimetre
<b>Article compression class</b>	PN 10
<b>With blow-off valve</b>	Yes
<b>Surface protection</b>	Untreated
<b>Whirl operating principle</b>	No
<b>Negative pressure operating principle</b>	No
<b>Magnet operating principle</b>	Yes
<b>Thrust operating principle</b>	No
<b>Partial flow principle</b>	Yes
<b>Principle full flow with settling</b>	Yes
<b>Cleaning possible during operation</b>	No
<b>Magnet location</b>	Internal
<b>Suitable for open system</b>	No
<b>Suitable for closed system</b>	Yes
<b>With drain valve</b>	Yes
<b>With dismountable filter</b>	No
<b>Filter volume</b>	0 Litre
<b>Filter mesh density</b>	0 Millimetre
<b>Backwash filter</b>	No
<b>Min. pressure for back flush</b>	0 Bar
<b>With automatic de-aerator</b>	No
<b>With couplers</b>	No
<b>Inlet/outlet offset distance</b>	0 Millimetre
<b>Medium temperature (continuous)</b>	-10 - 120 °C
<b>Max. operating pressure</b>	10 Bar
<b>Kvs value</b>	0
<b>With insulation</b>	Yes
<b>Heat conduction coefficient insulation material (λ)</b>	0.04 Watt per meter Kelvin
<b>Max. glycol mixture</b>	50 Percentage
<b>With integrated replenishment automat</b>	No

**Find more information online:**[Installations and operating instructions](#)[Statement of Conformity](#)[XStream Clean DWG](#)[XStream Clean STEP](#)[XStream Clean RFA](#)[Brochure \(English\)](#)[Brochure \(Romanian\)](#)[Leaflet \(English\)](#)[Leaflet \(Romanian\)](#)[Technical Handbook \(English\)](#)[Packaging data](#)[Report Hysopt](#)[EPBD Energy saving solutions](#)[EPBD Energy saving solutions UK](#)[XStream \(English\)](#)[XStream \(Romanian\)](#)[Explainer video XStream \(English\)](#)[Explainer video XStream \(Romanian\)](#)

Fort Blauwkapel 1  
1358 DB, Almere - nl

T +31 (0)36 52 62 300  
E [info@aalberts-hfc.com](mailto:info@aalberts-hfc.com)  
I [flamcogroup.com](http://flamcogroup.com)